

# HUNTCO BIKE RACK Installation Instructions

## FLANGE MOUNT

Locate the rack as shown in the drawings, either 18" or 24" from the wall, depending on the mounting location.

Mark bolt holes with the hammer drill by drilling through flange holes.

Remove rack from hole marks and drill holes about 4" deep.

Tap anchor bolts into holes, leaving about one inch exposed.

Place rack over bolts.

Install washers, nuts and tighten.




### Parts Required

Hammer drill with 1/2" bit

4"x1/2" anchor bolts

1/2" wrench

Hammer

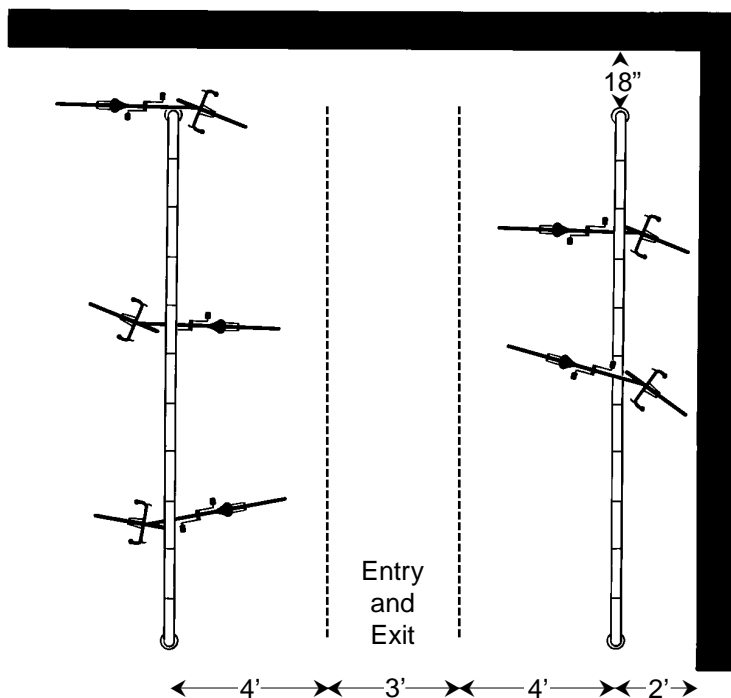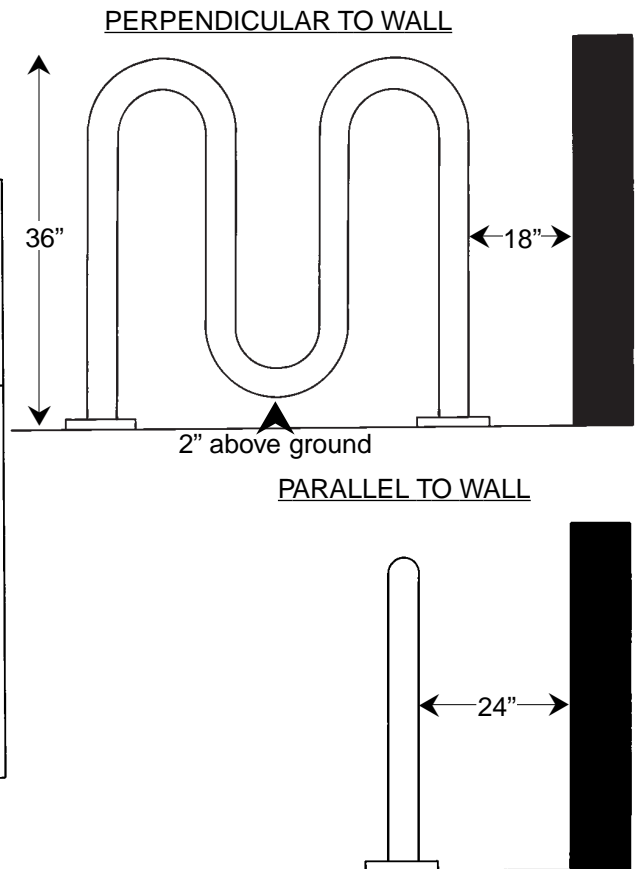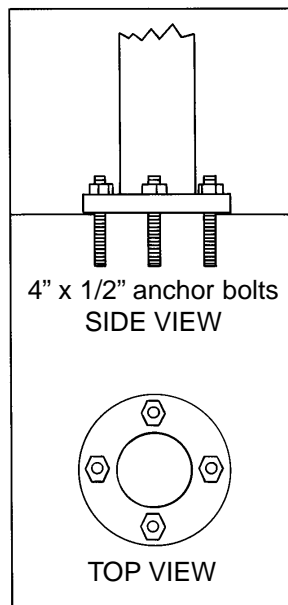

### Bike Rack Placement

When positioning a Huntco Bike Rack parallel to a wall, leave a 2' space between the rack and the wall and an open space of at least 4' on the other side of the rack for the bicycles.

When positioning a Huntco Bike Rack perpendicular to a wall, leave an 18" space between the end of the rack and the wall to allow room for a bike on the end of the rack.

If two or more bike racks are positioned parallel to each other, there must be at least 11' between the racks. This will provide 4' of space for the bicycles in each rack plus 3' of open space for entering and exiting the area (see diagram.)

If two or more bike racks are placed end-to-end, provide for a minimum of 2' between the ends of the racks to allow for bikes on the end of each rack.

**For any questions about installation, call Huntco at 1.800.547.5909**